

FACILITIES MANAGEMENT CATALOGUE

2024 - 2025



| FACILITIES MANAGEMENT CONTENT |
|-------------------------------|
|-------------------------------|

| *ADP10 | | XGT | | | | | | | |
|--------|------------|---------------------------------|--|--|--|--|--|--|--|
| | (T Adaptor | 8.0 Ah BL4080F (191X65-8) | 5.0 Ah BL4050F (191L47-8) | 4.0 Ah BL4040F (191B26-6) | 2.5 Ah BL4025F (191B36-3) | 6.0 Ah BL1860B (197422-4) | 5.0 Ah BL1850B (632F15-1) | 4.0 Ah BL1840B (197265-4) | 3.0 Ah BL1830B (197599-5) |
| | DC40RA | 72 minutes | 50 minutes | 45 minutes | 28 minutes | 40* minutes | 35* minutes | 29* minutes | 22* minutes |
| XGT | DC40RB | 72 minutes | 50 minutes | 45 minutes | 28 minutes | 40* minutes | 35* minutes | 29* minutes | 22* minutes |
| | DC18RC | - | - | - | - | 55 minutes | 45 minutes | 36 minutes | 22 minutes |
| | DC18RD | - | - | - | - | 55 minutes | 45 minutes | 36 minutes | 22 minutes |
| | DC18RE | - | - | - | - | 55 minutes | 45 minutes | 36 minutes | 22 minutes |



| SYMBOL KEY | | | | |
|------------|------------------------------------|--|--|--|
| XGT | Next Generation Technology | | | |
| LXT | Lithium-ion Extreme Technology | | | |
| CONNECTX | Back-Pack Battery Connection X | | | |
| BL | Brushless Motor | | | |
| AFT | Active Feedback Sensing Technology | | | |

| BATTERIES | | | |
|------------------------------|----------------------------|------------------------------|---------------------------------|
| BL1860B LXT 6.0 Ah | Tankitis Caterritin man | BL1850B LXT 5.0 Ah | Transition Control 100 march |
| BL4080F XGT 8.0 Ah | | BL4050F XGT 5.0 Ah | Comp. |
| | | | |

| CHARGERS AND ADAPTI | EDC |
|---------------------|-----|
| ΟΠΑΚΘΕΚΌ ΑΝΟ Αυάρτι | ERO |
| | |







DC40RB Fast Twin Charger



FILE

| POWER SOURCE KITS | | | | |
|-------------------|---|--|--|--|
| 1910A2-5 | XGT 40V 8.0Ah - BL4080F x2 Batteries, DC40RB 240V Charger & Makpac | | | |
| 1910B1-4 | XGT 40V 8.0Ah - BL4080F x4 Batteries, DC40RB 240V Charger & Makpac | | | |
| 191J85-8 | XGT 40V 2.5Ah - BL4025 x2 Batteries, DC40RA 240V Charger & Makpac T | | | |
| 191K01-6 | XGT 40V 4.0Ah - BL4040 x2 Batteries, DC40RA 240V Charger & Makpac T | | | |
| 191U20-2 | XGT 40V 5.0Ah - BL4050F x2 Batteries, DC40RB 240V Charger & Makpac | | | |
| 191U48-0 | XGT 40V 5.0Ah - BL4050F x4 Batteries, DC40RB 240V Charger & Makpac | | | |
| 191V42-8 | XGT 40V 5.0AH - BL4050F x2 Batteries DC40RA 240V Charger & Makpac | | | |

FACILITIES MANAGEMENT

makità makità **BL1840B** LXT 4.0 Ah **BL1830B** LXT 3.0 Ah **BL4040F** XGT 4.0 Ah **BL4025F** XGT 2.5 Ah

DC40RC Fast Twin Charger **DC18RD** Fast Twin Charger DEAADP001G XGT USB Adaptor

с Туре 3 ас Туре 3 Type 1 : Type 1 с Туре 3 с Туре 3 ac Type 2

79 -

BOOK YOUR CORDLESS CLEANING EXPERIENCE

.

Makita UK would like to invite you to get to grips with our cordless cleaning tools via an appointment with one of our experienced team members.



Tnakita

BL

XGT

COMMERCIAL CLEANING






XGT is a system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

Optimum power supply and charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. A battery technology and motor that work together for optimum performance.



Built Tough


4-LED fuel gauge indicator





absorb impact

Shock Absorption Structure



Waterproof Triple-layer Structure

Digital communication Tool ◀► Battery ◀► Battery Charger





High Rigidity Battery Rails



XGT 40V Max | Brushless Backpack Vacuum

| SPECIFICATIONS | VC011G |
|------------------------|-------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 6.4 - 9.5 kg |
| Machine Type | Dry |
| Maximum Sealed Suction | 20 kPa |
| Maximum Air Volume | 2.4m ³ /min |
| Capacity | Paper: 6L Cloth: 5.5L |
| Suction Power | 25 - 195 W |
| Run Time - 5.0 Ah (x2) | 40 - 260 mins |
| | |

STANDARD EQUIPMENT:

VC011GZ

Nozzle Assembly | Bent Pipe | Telescopic Pipe | Hose Band | Dust Bag | Corner Nozzle | Long Sash Nozzle

HEPA FILTER

Thakita RL

BRUSHLESS MOTOR

Adjustable shoulder and waist belts for more comfortable use during long operation.

COMFORTABLE HARNESS

Body Only





nak

HEPA Filter is used to capture 99.97% of

The brushless motor is more energy efficient providing greater run time.



XGT 40V Max | Brushless Backpack Vacuum

| VC008G |
|-------------------------|
| 40V Max |
| Yes |
| HEPA |
| 4.1 - 5.3 kg |
| Dry |
| 18 kPa |
| 2.4m³/min |
| Paper: 2L Cloth: 1.5L |
| 25 - 195 W |
| 14 - 110 mins |
| |

STANDARD EQUIPMENT:

Nozzle Assembly | Bent Pipe | Telescopic Pipe | Vacuum Hose | Hose Band | Filter Bag

VC008GZ02



| makita. | |
|-----------|---|
| - EL HEPA | |
| | |
| | |
| | Selfer and a self of the self |
| | |
| | |



ACCESSORIES 127082-8 199038-1 Nozzle Combi 199041-2 • Assembly Set Seat Nozzle 199453-9 (32 mm) 198532-0 143787-2 (28 mm) F/C Switching Vacuum Hose Combi T-Nozzle 198873-4 127082-8 (280 mm) 198538-8 🔵 199454-7 (285 mm) Nozzle Assembly Shelf Brush 140G19-0 1911W4-1 **Telescopic Pipe** Protective Cover 197901-2 140G26-3 Flexible Nozzle Bent Pipe (non-marking) 197899-3 (2L) 197903-8 191C30-1 (6L) Filter Bag Set (2L) **Dust Bag Assembly**



COMMERCIAL CLEANING







198878-4 **Oval Brush**

410306-2 199439-3 **Crevice Nozzle**

198919-6 Long Sash Nozzle

123486-2 Nozzle Assembly

199843-6 (m-f) 199844-4 (m-m) Straight Pipe

127725-2 Main Filter H Set











XGT 40V Max | Brushless Upright Vacuum Cleaner

| SPECIFICATIONS | VC010G |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 8.0 - 9.2 kg |
| Maximum Sealed Suction | 15 kPa |
| Maximum Air Volume | 1.8m ³ /min |
| Capacity | 5L |
| Suction Power | 25 - 110 W |
| Run Time - 5.0 Ah | 25 - 100 mins |

STANDARD EQUIPMENT: Long Sash Nozzle | Round Brush | Filter Bag

VC010GZ Body Only



HEIGHT ADJUSTMENT

Brush height adjustment dial for cleaning carpet or hard floor application.



EASY MAINTENANCE

Tool-less brush removal for easy maintenance.



CONTROL PANEL

Speed indicator, dust disposal warning, brush roll error and battery capacity warning lamps.





ACCESSORIES 191D65-8 1910T8-6 Long Sash Nozzle Brush 197903-8 191Y86-6 Round Brush Reusable Bag **SIDE BRUSHES** LED LIGHT LED light for working in dark Side brushes on both sides are convenient or dimly lit spaces. for cleaning along and close to walls.





COMMERCIAL CLEANING





191T96-3 Filter Bag (10 pc)





Main body can tilt up to 90 degrees. This enables cleaning in tight spaces.

90° TILT ANGLE





| SPECIFICATIONS | VC001GL | SPECIFICATIONS | V |
|------------------------|------------------------|------------------------|----|
| Voltage | 40V Max | Voltage | 4 |
| Brushless Motor | Yes | Brushless Motor | Ye |
| Filter | L Class | Filter | L |
| Weight | 8.1 - 11.2 kg | Weight | 8. |
| Machine Type | Wet and Dry | Machine Type | W |
| Maximum Sealed Suction | 23 kPa | Maximum Sealed Suction | 2 |
| Maximum Air Volume | 3.2m ³ /min | Maximum Air Volume | 3. |
| Capacity | Wet: 6L Dry: 8L | Capacity | W |
| Suction Power | 265 W | Suction Power | 2 |
| Run Time - 8.0 Ah (x2) | 45 - 352 mins | Run Time - 8.0 Ah (x2) | 4 |
| Run Time - 5.0 Ah (x2) | 28 - 220 mins | Run Time - 5.0 Ah (x2) | 2 |

STANDARD EQUIPMENT:

Nozzle Assembly | Telescopic Pipe | Bent Pipe | Hose | Poly Bag Set | Multi Hook | Stopper | Long Sash Nozzle | Cloth Filter Set

VC001GLZ Body Only

| SPECIFICATIONS | VC003GL |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | L Class |
| Weight | 8.4 - 11.5 kg |
| Machine Type | Wet and Dry |
| Maximum Sealed Suction | 23 kPa |
| Maximum Air Volume | 3.2m ³ /min |
| Capacity | Wet: 15L Dry: 12L |
| Suction Power | 265 W |
| Run Time - 8.0 Ah (x2) | 45 - 352 mins |
| Run Time - 5.0 Ah (x2) | 28 - 220 mins |

STANDARD EQUIPMENT:

Nozzle Assembly | Telescopic Pipe | Bent Pipe | Hose | Poly Bag Set | Multi Hook | Stopper | Long Sash Nozzle | Cloth Filter Set

VC003GLZ Body Only

| SPECIFICATIONS | VC005GL |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | L Class |
| Weight | 7.9 - 11.0 kg |
| Machine Type | Dry |
| Maximum Sealed Suction | 23 kPa |
| Maximum Air Volume | 2.8m ³ /min |
| Capacity | 8L |
| Suction Power | 265 W |
| Run Time - 8.0 Ah (x2) | 45 - 352 mins |
| Run Time - 5.0 Ah (x2) | 28 - 220 mins |

STANDARD EQUIPMENT:

Nozzle Assembly | Telescopic Pipe | Bent Pipe | Hose | Poly Bag Set | Multi Hook | Stopper | Long Sash Nozzle

VC005GLZ

Body Only



COMMERCIAL CLEANING





191V70-3 Powder Filter H Set

191V68-0 Damper Set

199493-7 Hose 32mm x 1.7m

191V69-8 Shake Off Pre Filter Set

1

195432-5 Poly Bag (10 pc)







L-CLASS IS SUITABLE FOR Mica, china clay and gypsum. REMOVES 99% OF DUST WITH A LIMIT VALUE FOR OCCUPATIONAL EXPOSURE > 1.0 MG/M³

XGT 40V Max | Brushless Vacuum Sweeper

| SPECIFICATIONS | VC008G |
|------------------------|----------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 29.9 - 44.0 kg |
| Machine Type | Dry |
| Dust Capacity | 24L |
| Sweeping Capacity | 2,600 m²/h |
| Working Width | 650 mm |
| Run Time - 8.0 Ah (x2) | 200 - 480 mins |
| Run Time - 5.0 Ah (x2) | 120 - 290 mins |



Body Only VS001GZ





LED LIGHTS

FOLDABLE

Handle can be folded to

stand the machine upright for

Illuminates dust or obstacles in low light environments such as warehouses.






SIDE BRUSH

The side brush on the front allows the user to clean up the edge of walls.



Main brush height can be adjusted by approximately 20mm.

ADJUSTABLE











COMMERCIAL CLEANING



137059-5 Dust Bag Set 24L

1830S5-9 Main Brush Repair Set



1913F7-8 Dust Bag Set 47L



XGT 40V Max | BL Stick Vacuum

XGT 40V Max | BL Stick Vacuum









| SPECIFICATIONS | CL001G |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | Quick Shake Off |
| Weight | 1.7 - 2.9 kg |
| Maximum Sealed Suction | 21 kPa |
| Maximum Air Volume | 1.2m ³ /min |
| Capacity | 730 ml |
| Suction Power | 20 - 125 W |
| Run Time - 4.0 Ah | 26 - 128 mins |
| Run Time - 2.5 Ah | 16 - 80 mins |

STANDARD EQUIPMENT:

Nozzle Assembly | Sash Nozzle and Holder | Suction Tube

Body Only CL001GZ04



CYCLONE ATTACHMENT

The efficient cyclonic action captures up to 90% of dust particles and increases productivity by reducing the need to empty the main canister/filter by 84%.

| Voltage | 40V Max |
|------------------------|-------------------------------|
| Brushless Motor | Yes |
| Filter | Paper Bag Type |
| Weight | 1.8 - 3.0 kg |
| Maximum Sealed Suction | 21 kPa |
| Maximum Air Volume | 1.2m ³ /min |
| Capacity | Cloth: 500 ml Paper: 330 ml |
| Suction Power | 20 - 125 W |
| Run Time - 4.0 Ah | 26 - 128 mins |
| Run Time - 2.5 Ah | 16 - 80 mins |

CL002G

STANDARD EQUIPMENT:

Nozzle Assembly | Paper Filter | Sash Nozzle and Holder | Suction Tube

Body Only CL002GZ03

SPECIFICATIONS



PUSH BUTTON SWITCH

One touch push button switch equipped with 4 speed options for power and run time management.

| SPECIFICATIONS | CL003G |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | Easy Shake Off |
| Weight | 1.9 - 3.0 kg |
| Maximum Sealed Suction | 20 kPa |
| Maximum Air Volume | 1.0m ³ /min |
| Capacity | 250 ml |
| Suction Power | 15 - 100 W |
| Run Time - 4.0 Ah | 26 - 128 mins |
| Run Time - 2.5 Ah | 16 - 80 mins |

STANDARD EQUIPMENT: Nozzle Assembly | Sash Nozzle and Holder | Suction Tube

CL003GZ04 Body Only



COMMERCIAL CLEANING



ACCESSORIES

199966-0 Shake Off Filter

1910M4-5 Reusable **Cloth Bag**

1910C9-5 Quick Shake Off HEPA Filter

191D73-9 Cyclone Attachment

199971-7 Wall Attachment

127825-8 Floor T Nozzle

127827-4 Floor T Nozzle

199038-1 Car Seat Nozzle















199989-8 **HEPA** Filter

194566-1 Paper Bag (5 pc)

1910C7-9 Quick Shake Off Filter

191D77-1 Straight Pipe with Lock

140G19-0 Telescopic Pipe

127828-2 T Nozzle

199041-2 Car Seat Nozzle



459038-6 Nozzle Holder







LXT is a system with its own tools, batteries, and chargers. A combination of innovative tool design and optimum power provide a genuine solution for high demand industrial users.

Optimum power supply and charging system

The LXT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. A battery technology and motor that work together for optimum performance.





OPTIMUM CHARGING

After use a battery reaches a high temperature and it is necessary to cool the battery down before you charge it. Makita are able to produce fast charge times because our batteries and chargers are kept cool whilst the battery is connected.

LONGER WORK TIME

Makita's 18v & 14v batteries have a built in memory chip that records the battery usage history. While the battery is connected it will transmit the data to the charger.

BUILT-IN CPU

The CPU built into the charger communicates with the individual battery and analyses its condition; the battery may have been abused by heat, overdischarging, or weathered by cycle-age. This optimised charging system extends the life of the battery.

ANYTIME CHARGE



A great advantage of Lithium Ion technology is that it provides the user with the possibility to charge the batteries anytime, without any need to wait for their complete power deployment. A great improvement compared to older technologies like Ni-Cad.

Built Tough 4-LED fuel gauge indicator





casing and cell holde

Create a space to absorb impact

Shock Absorption Structure



High Rigidity Battery Rails



LXT 18V | Brushless Robot Vacuum Cleaner

| DRC300 |
|--------------------|
| 18V |
| Yes |
| HEPA |
| 9.6 - 10.6 kg |
| 500 x 500 x 204 mm |
| 3L |
| 0.3 m/s |
| 240 mins |
| |



BL LXT


STANDARD EQUIPMENT: RF Remote Controller | Side Brush Assembly

DRC300Z Body Only

CONTROL

LIDAR SCANNER

Use the RF Remote or the smartphone app to track cleaning progress and history.



Gives a basic 3D shape to

the obstacles that the LiDAR scanner discovers.

CAMERA SENSOR

600m² cleaning area on a full charge. It can also map and memorise 5 seperate rooms.

MAPPING





degrees to map a room.







LXT 18V | Brushless Robot Vacuum Cleaner

| SPECIFICATIONS | DRC300 |
|------------------------|--------------------|
| Voltage | 18V |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 7.3 - 7.8 kg |
| Dimensions | 460 x 460 x 180 mm |
| Capacity | 2.5L |
| Running Speed | 0.3 m/s |
| Run Time - 6.0 Ah (x2) | 230 mins |

STANDARD EQUIPMENT: RF Remote Controller | Side Brush Assembly

DRC300Z Body Only





<u>IXT</u>





| SH00000231 Sensor Wall Tape | | SH00000219 Remote Controller | A sile a . |
|--------------------------------------|------------|---------------------------------------|------------|
| SH00000065 Side Brush Assembly | ** | SH00000321 Soft Side Brush | ** |
| SH00000213 Filter | \bigcirc | SH00000314 Rotation Brush Cover | 0 |
| SH00000320 Soft Power Brush | | SH00000313 Power Brush Assembly | |

LXT 36V (18V x2) | Brushless Backpack Vacuum

| SPECIFICATIONS | DVC660 |
|------------------------|-------------------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 6.1 - 6.7 kg |
| Machine Type | ? |
| Maximum Sealed Suction | 11 kPa |
| Maximum Air Volume | 2.2m ³ /min |
| Capacity | Paper: 6L Cloth: 5.5L |
| Suction Power | 25 - 95 W |
| Run Time - 6.0 Ah (x2) | 40 - 140 mins |
| | |



DVC660Z

Body Only

STANDARD EQUIPMENT: Floor Nozzle | Flexible Rubber Nozzle | Telescopic Pipe | Hose | Bent Pipe | Hose Band | Filter Bag

BL LXT 36V

| CAPACITY | COMFORTABLE | HEPA FILTER | CONTROL |
|--|--|---|--|
| Manually clean the dust bag by pulling down the lever. | Features shoulder and waist belts adjustable to suit the users size for more comfortable use during long operation. | Used as the main filter to capture fine particles. Able to capture 99.97% of particles. | - On / off switch - High / low power selection, - LED job light. |
| | Traction | | |













LXT 36V (18V x2) | Brushless Backpack Vacuum

| SPECIFICATIONS | DVC261 |
|------------------------|-------------------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 3.8 - 4.5 kg |
| Machine Type | Dry |
| Maximum Sealed Suction | 11 kPa |
| Maximum Air Volume | 2.3m³/min |
| Capacity | Paper: 2L Cloth: 1.5L |
| Suction Power | 30 - 105 W |
| Run Time - 6.0 Ah (x2) | 40 - 140 mins |

STANDARD EQUIPMENT: Floor Nozzle | Flexible Nozzle | Telescopic Pipe | Hose | Bent Pipe | Hose Band | Filter Bag

| Body Only | | DVC261ZX11 | |
|-----------|---|------------|--|
| | | | ACCESSORIES |
| | 191496-7 Flexible Hose | | 127828-2 ● 127828-8 127828-4 ● Floor T Nozzle |
| 9 | 199038-1 199041-2 ● Car Seat Nozzle | AR CO | 198532-0 F/C Switching T Nozzle (combi) |
| mbly | 140G26-3 127093-3 126756-8 Bent Pipe Assemi | - Ale | 127082-8 Large Nozzle Assembly |
| | 191C30-1 197899-3 Reusable Bag | | 197901-2 Flexible Rubber Nozzle |
| , | 191D12-9 127725-2 Filter Assembly | 1 | 1911J6-6 Carpet Nozzle Assembly |
| | 199453-9 143787-2 Hose | | 191C26-2 197903-8 Filter Bag (10 pc) |
| | 198873-4 198538-8 Shelf Brush | | 198878-4 Oval Brush |
| r | Car Seat Nozzle 140G26-3 127093-3 126756-8 Bent Pipe Asser 191C30-1 197899-3 Reusable Bag 191D12-9 127725-2 Filter Assembly 199453-9 143787-2 Hose 198873-4 198538-8 | | T Nozzle (combi) 127082-8 Large Nozzle Assembly 197901-2 Flexible Rubber Nozzle 1911J6-6 Carpet Nozzle Assembly 191C26-2 197903-8 Filter Bag (10 pc) 198878-4 |

COMMERCIAL CLEANING



BL LXT 36V





413859-0 198990-0 🔵 198919-6 Sash Nozzle

123584-2 Plastic Telescopic Pipe

140G19-0 Aluminium Telescopic Pipe

199844-4 (m-m) **199843-6** (m-f) Aluminium Pipe

1911J4-0 Hard Floor Nozzle Assembly







LXT 36V (18V x2) | Brushless Upright Vacuum Cleaner

| SPECIFICATIONS | DVC560 |
|------------------------|---------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Filter | HEPA |
| Weight | 8.3 - 9.0 kg |
| Maximum Sealed Suction | 12 kPa |
| Maximum Air Volume | 1.9m³/min |
| Capacity | 5L |
| Suction Power | 25 - 85 W |
| Run Time - 6.0 Ah x2 | 30 - 120 mins |
| Run Time - 6.0 Ah x2 | 30 - 120 mins |

STANDARD EQUIPMENT: Long Sash Nozzle | Round Brush | Filter Bag | HEPA Filter


DVC560Z Body Only





HEIGHT ADJUSTMENT

Brush height adjustment dial for cleaning carpet or hard floor application.



EASY MAINTENANCE

Tool-less brush removal for easy maintenance.



CONTROL PANEL

Speed indicator, dust disposal warning, brush roll error and battery capacity warning lamps.





ACCESSORIES



LED LIGHT

LED light for working in dark or dimly lit spaces.

HEPA FILTER

5.0L Capacity disposable bags with HEPA filter that captures up 99.97% of particles.





COMMERCIAL CLEANING

LXT

191T96-3 Filter Bag (10 pc)



191E39-5 Filter

90° TILT ANGLE

Main body can tilt up to 90 degrees. This enables cleaning in tight spaces.



LXT18V | BL Stick Vacuum





DCL284F

Quick Shake Off

18V

Yes

LXT 18V | BL Stick Vacuum



LXT 18V | BL Stick Vacuum

BL LXT

| SPECIFICATIONS | DCL286F |
|------------------------|------------------------|
| Voltage | 18V |
| Brushless Motor | Yes |
| Filter | Quick Shake Off |
| Weight | 1.9 - 4.2 kg |
| Maximum Sealed Suction | 18 kPa |
| Maximum Air Volume | 1.0m ³ /min |
| Capacity | 250 ml |
| Suction Power | 15 - 100 W |
| Run Time - 3.0 Ah | 8 - 38 mins |

STANDARD EQUIPMENT:

Nozzle Assembly | Nozzle Holder | Sash Nozzle | Pipe

Body Only

DCL286FZB



CYCLONE ATTACHMENT

The efficient cyclonic action captures up to 90% of dust particles and increases productivity by reducing the need to empty the main canister/filter by 84%.

Weight 1.3 - 1.6 kg Maximum Sealed Suction 18 kPa Maximum Air Volume 1.2m³/min 730 ml Capacity Suction Power 20 - 125 W Run Time - 3.0 Ah 8 - 38 mins

STANDARD EQUIPMENT: Nozzle Assembly | Nozzle Holder | Sash Nozzle | Pipe

DCL284FZB Body Only

SPECIFICATIONS

Brushless Motor

Voltage

Filter



PUSH BUTTON SWITCH

One touch push button switch equipped with 4 speed options for power and run time management.

| DCL282F |
|-------------------------------|
| 18V |
| Yes |
| Paper Bag |
| 1.3 - 1.6 kg |
| 8.2 kPa |
| 1.5m ³ /min |
| Cloth: 500 ml Paper: 330 ml |
| 15-60 W |
| 15 - 50 mins |
| |

STANDARD EQUIPMENT:

Nozzle | Straight Pipe | Sash Nozzle

DCL282FZ





COMMERCIAL CLEANING

<u>IXT</u>

ACCESSORIES

199966-0 Shake Off Filter

1910D5-0 Cyclone Unit

1910C9-5 Quick Shake Off HEPA Filter

191D73-9 Cyclone Attachment

199971-7 Wall Attachment

127828-2 T Nozzle

413809-5 Sash Nozzle

198915-4 Filter Set

198523-1 T Nozzle

198538-8 Shelf Brush











199989-8 **HEPA Filter**

194566-1 Paper Bag (5 pc)

1910C7-9 Quick Shake Off Filter

191D77-1 Straight Pipe with Lock

459038-6 Nozzle Holder



123539-7 T Nozzle

191E30-3 Flexible Hose

198751-8 Pre Filter Set

413859-0 Sash Nozzle

198549-3 Round Brush









LXT 18V | Brushless Vacuum Cleaner

| SPECIFICATIONS | VC001GL |
|------------------------|------------------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Filter | HEPA L Class |
| Weight | 8.1 - 10.0 kg |
| Machine Type | Wet and Dry |
| Maximum Sealed Suction | 4.2 - 6.7 kPa |
| Maximum Air Volume | 1.6m ³ /min |
| Capacity | Wet: 4.5L Dry: 7.5L |
| Suction Power | 25 - 50 W |
| Run Time - 5.0 Ah | 30 - 60 mins |



STANDARD EQUIPMENT: Wide Nozzle | Crevice Nozzle | Hose

Body Only

DVC750LZ

| LIGHTWEIGHT | HEPA FILTER | CONTROLS | EASY CHANGE |
|--|--|--|--|
| The weight is removed from the users wrist and hand by using the clip on shoulder strap. | 7.5L Capacity disposable bags with HEPA filter that captures up 99.97% of particles. | On/off and variable 3-stage speed control via on touch push buttons. | Simply open the door on the side of the vacuum to access and change the bag. |
| Takita | Truakita. | | |

LXT 18V | Vacuum Cleaner

| SPECIFICATIONS | VC001GL |
|------------------------|-------------------------------|
| Voltage | 18V |
| Filter | HEPA |
| Weight | 1.8 - 2.2 kg |
| Maximum Sealed Suction | 5.4 kPa |
| Maximum Air Volume | 1.4m ³ /min |
| Capacity | Cloth: 550 ml Paper: 330 ml |
| Suction Power | 5 - 38 W |
| Run Time - 6.0 Ah | 40 - 160 mins |

STANDARD EQUIPMENT:

Seat and Mat Nozzles | Rubber Nozzle | Soft Brush | Blower Attachment | Dust Bag | Paper Dust Bag | Shoudler Belt

DCL184Z

Body Only







ACCESSORIES



COMMERCIAL CLEANING















166084-9 Cloth Bag

140H92-6 Hose

162544-9 Shoulder Belt

832188-6 Tool Bag

422437-5 Rubber Nozzle

194566-1 Paper Bag (5 pc)











BOOK YOUR CORDLESS GARDEN EXPERIENCE

Makita UK would like to invite you to get to grips with our cordless garden power tools via an appointment with one of our experienced team members.

GROUNDS MAINTENANCE



Tnakita

XGT 40V Max | Brushless Blower

| UB001G |
|------------------------|
| 40V Max |
| Yes |
| 3.1 - 3.9 kg |
| 0 - 23,000 rpm |
| 1.6m ³ /min |
| 64 m/s |
| |

STANDARD EQUIPMENT:

Shoulder Belt | Adaptor Pipe | End Nozzle | Extension Nozzle | Flat Nozzle

| UB001GD202 | 2.5 Ah XGT Battery (x2) XGT Battery Charger |
|------------|---|
| UB001GZ | Body Only |

LXT 18V | Brushless Blower and Vacuum

| SPECIFICATIONS | DUB187 |
|--------------------------------------|---|
| Voltage | 18V |
| Brushless Motor | Yes |
| Weight | 3.7 - 4.0 kg |
| No Load Speed | 9,000 - 13,500 rpm |
| Maximum Air Volume - Blower Vacuum | 4.2 m ³ /min 6.1 m ³ /min |
| Maximum Air Velocity | 64 m/s |
| Maximum Sealed Suction | 3.3 kPa |
| Capacity | 25 L |

STANDARD EQUIPMENT:

Collector Bag | Strap

VERSATILE

DUB187Z

Body Only

3-tools-in-1: blower, vacuum

| and mulcher for convenient clean-up. | spe tim |
|--------------------------------------|------------|
| BRUSHLESS ODDO | 3 |



DESIGN





10:1 mulch ratio reduces up to

10 bags of leaves down to 1 bag

CAPACITY



Brushless motor delivers up to

148 CFM of blowing power and

215 CFM of suction power.

Vo Br W No Load Speed Max Air Volume

| A | BL CONNECTX |
|----------------|----------------|
| PECIFICATIONS | UB004C |
| oltage | 36V (18V x2) |
| rushless Motor | Yes |
| /eight | 16.5 - 18.6 kg |

SPECIFICATIONS UB002C 36V (18V x2) Voltage **Brushless Motor** Yes Weight 15.9 - 16.1 kg No Load Speed 0 - 22,000 rpm Max Air Volume 0 - 19.0 m³/min Max Air Velocity 0 - 76.0 m/s

STANDARD EQUIPMENT: Pipe Support Belt | End Nozzle | Flat Nozzle Adaptor Pipe

0 - 22,500 rpm

0 - 19.7 m³/m

0 - 63.8 m/s

Body Only

UB002CX3

UB002CZ

36V | BL Blower



BL LXT 36V

| SPECIFICATIONS | DUB362 |
|------------------|-------------------------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Weight | 3.5 - 4.2 kg |
| No Load Speed | 11,400 - 21,500 rpm |
| Max Air Volume | 6.9 - 13.4m ³ /min |
| Max Air Velocity | 27.0 - 54.0 m/s |

STANDARD EQUIPMENT:

Shoulder Belt | Flat Nozzle | Telescopic Nozzle

| DUB362PG2 | 6.0 Ah (x2) Charger | DUB184RT |
|-----------|-----------------------|----------|
| DUB362PT2 | 5.0 Ah (x2) Charger | DUB184Z |
| DUB362Z | Body Only | |







36V | BL Blower



Brushless Motor Weight No Load Speed Max Air Volume Max Air Velocity

SPECIFICATIONS

Voltage

STANDARD EQUIPMENT: Shoulder Belt | Adaptor Pipe | Extension Nozzle Flat Nozzle | Hex Wrench

| DUB184RT | 5. |
|----------|----|
| DUB184Z | Bo |



POWER

Contraction of the second seco

BL LXT

UB004CZ

Max

Max Air Velocity

36V | BL Blower

36V | BL Blower



STANDARD EQUIPMENT:

Portable Power Pack Body Only

18V | BL Blower





DUB184

18V Yes 2.5 - 3.0 kg 0 - 18,000 rpm 13.0 m³/min 52.1 m/s

.0 Ah (x2) | Charger ody Only

| SPECIFICATIONS | UB003C |
|------------------|--------------------------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Weight | 2.8 - 3.1 kg |
| No Load Speed | 4,000 - 22,100 rpm |
| Max Air Volume | 2.9 - 17.6 m ³ /min |
| Max Air Velocity | 86.0 m/s |
| | |

STANDARD EQUIPMENT:

Shoulder Strap | Nozzle Assembly

UB003CZ

Body Only

18V | Blower





| SPECIFICATIONS | DUB186 |
|------------------|-------------------------|
| Voltage | 18V |
| Brushless Motor | No |
| Weight | 1.6 - 2.1 kg |
| No Load Speed | 0 - 18,000 rpm |
| Max Air Volume | 3.2 m ³ /min |
| Max Air Velocity | 68.0 m/s |

STANDARD EQUIPMENT:

Garden Nozzle Assembly Set

| DUB186RT | |
|----------|--|
| DUB186Z | |

5.0 Ah (x2) | Charger Body Only

XGT 40V Max | BL Split Shaft LXT 36V | BL Split Shaft LXT 18V | BL Split Shaft

| SPECIFICATIONS | UX01G |
|-----------------|---------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Weight | 4.2 - 12.6 kg |
| No Load Speed | 0 - 9,700 rpm |
| Maximum Output | 1,000 W |

STANDARD EQUIPMENT:

Shoulder Strap | Accessory Bag | Hex Wrench

| UX01GD202 | 2.5 Ah XGT Battery XGT Battery Charger |
|-----------|--|
| UX01GZ | Body Only |

| SPECIFICATIONS | UX01G |
|-----------------|---------------|
| Voltage | 36V (18V x2) |
| Brushless Motor | Yes |
| Weight | 4.1 - 8.7 kg |
| No Load Speed | 0 - 9,700 rpm |
| Maximum Output | 600 W |

STANDARD EQUIPMENT:

Nozzle Assembly | Nozzle Holder | Sash Nozzle | Pipe

| DU | X60PG2 | 6 |
|----|--------|---|
| DU | X60PT2 | 5 |
| DU | X60Z | В |

6.0 Ah LXT Battery (x2) | LXT Battery Charger 5.0 Ah LXT Battery (x2) | LXT Battery Charger Body Only

AFT BL LXT 36V

| SPECIFICATIONS | DUX18Z |
|-----------------|---------------|
| Voltage | 18V |
| Brushless Motor | Yes |
| Weight | 2.8 - 10.3 kg |
| No Load Speed | 0 - 9,700 rpm |
| Maximum Output | 470 W |

STANDARD EQUIPMENT:

Nozzle | Straight Pipe | Sash Nozzle

| DUX18RT | Body Only |
|---------|--|
| DUX18Z | 5.0 Ah LXT Battery LXT Battery Charger |



SPEED CONTROL

3-speed options (up to 9,700 rpm) allows the operator to match speed to application.



SPLIT SHAFT SYSTEM

Lever style lock system allows for quick tool-less installation and replacement of attachments.



TORQUE CONTROL


Electronic torque control turns the motor off if rotation speed suddenly slows down or stops.

SPLIT SHAFTS

GROUNDS MAINTENANCE



SPLIT SHAFT ATTACHMENTS

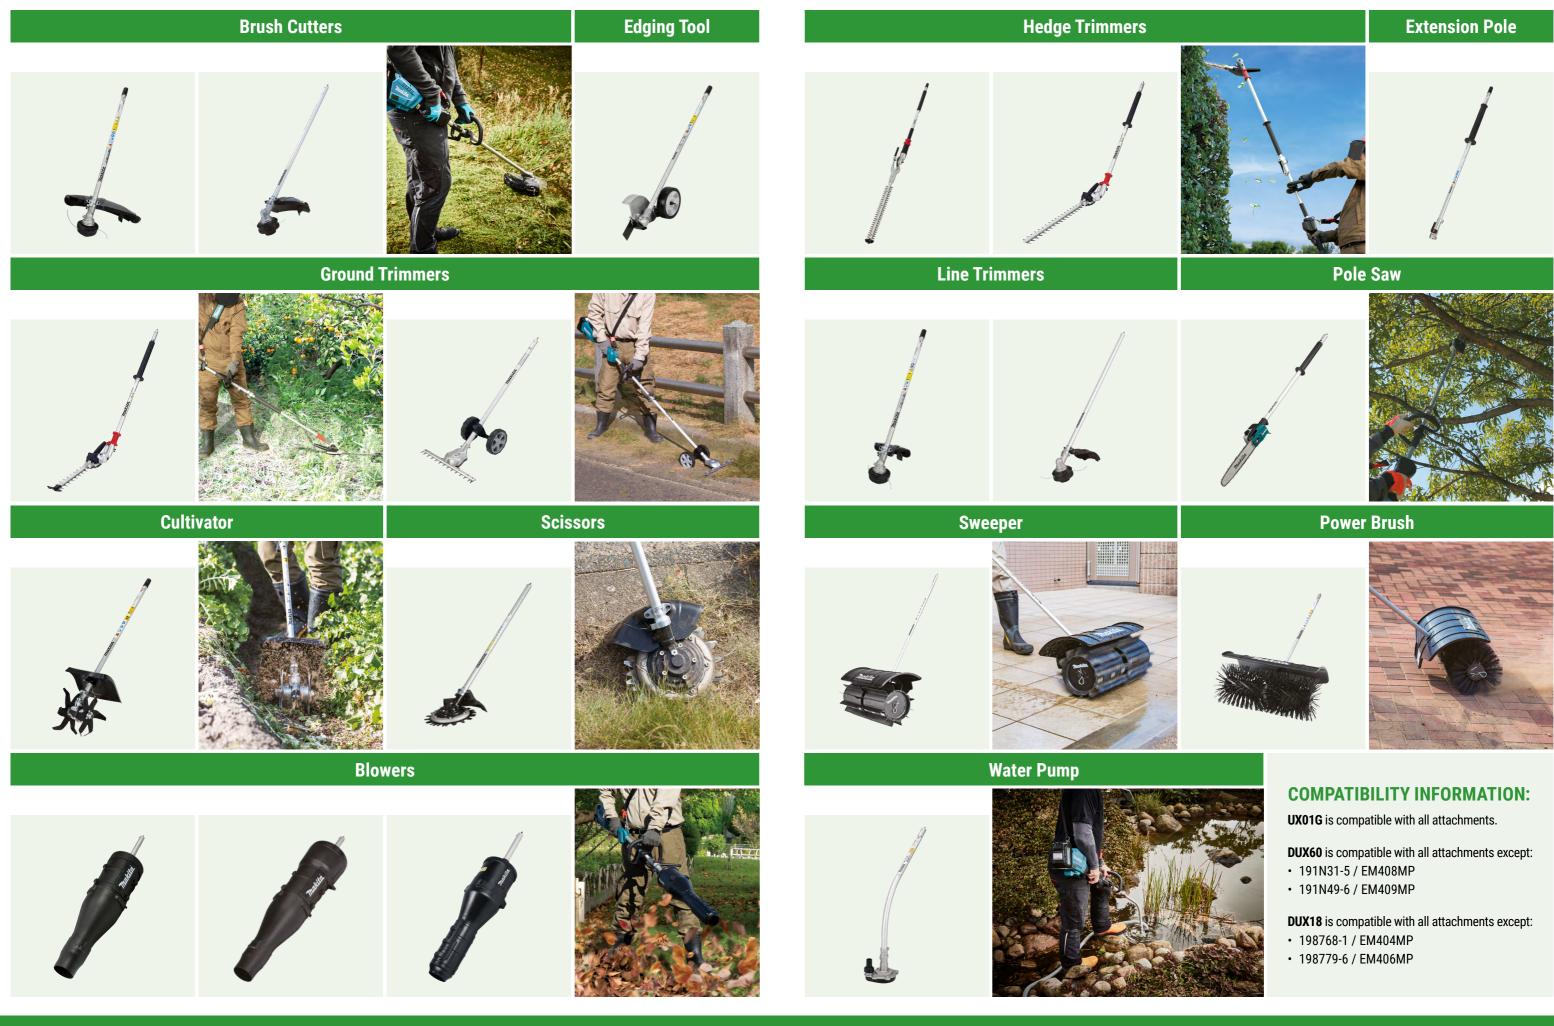

GROUNDS MAINTENANCE





Portable Power Supply Batteries





SPECIFICATIONS PDC1500 PDC1200 Max Output Power 1,500 Wh 1,200 Wh Charge Time 7.5 Hours 6 Hours 12.9 kg 10.4 kg Weight

| PDC1500A01 | Charger |
|------------|----------------------------|
| PDC1200A01 | Charger Twin 18V Adaptor |
| PDC1200A02 | Charger |



| ACCESSORIES | |
|---|---------------------------------------|
| DC4001 Charger | 191E43-4 Protection Harness |
| 191, J50-7 18V Adaptor | 191N62-4 40V Max Adaptor |

PDC1500 | PDC1200

With integrated battery cells







Use with 4x 18V batteries







GROUNDS MAINTENANCE



| SPECIFICATIONS | PDC01 |
|------------------|--------------|
| Max Output Power | 432 Wh |
| Charge Time | 22 - 55 mins |
| Weight | 7 kg |



Twin 18V Adaptor 18V Adapter | Twin 18V Adaptor 5.0 Ah Battery (x4) | Charger | Twin 18V Adaptor













XGT 40V Max | Brushless Power Washer

| SPECIFICATIONS | HW001G |
|--------------------------------|-----------------|
| Voltage | 40V Max |
| Brushless Motor | Yes |
| Weight | 8.5 - 13.4 kg |
| Pump Speed | 0 - 3,350 rpm |
| Regular Pressure | 85 bar |
| Maximum Permissable Pressure | 115 bar |
| Regular Flow Pressure | 3.0 - 5.5 L/min |
| Maximum Water Flow | 7.0 L/min |
| Maximum Water Feed Temperature | 40 °C |
| Run Time - 5.0 Ah (x2) | 18 - 60 mins |

STANDARD EQUIPMENT:

Hose Assembly | Trigger Gun | Strainer Assembly | Cycle Jet Nozzle | High Pressure Hose Vario Spray Nozzle Set | Connector Set | Extension Set





Body Only HW001GZ



COMPACT

Handle can be collapsed to make more compact for ease of storage.



MOBILE Extendable handle and wheels

allow for greater mobility.

LXT 36V (18V x2) | 50L Brushless Power Wash

| SPECIFICATIONS | DHW080 | | |
|--------------------------------|-----------------|--|--|
| Voltage | 36V (18V x2) | | |
| Brushless Motor | Yes | | |
| Weight | 6.4 - 7.7 kg | | |
| Pump Speed | 0 - 3,450 rpm | | |
| Regular Pressure | 30 - 50 bar | | |
| Maximum Permissable Pressure | 80 bar | | |
| Regular Flow Pressure | 240 - 330 L/min | | |
| Maximum Water Flow | 380 L/min | | |
| Maximum Water Feed Temperature | 40 °C | | |
| Tank Capacity | 50 L | | |
| Run Time - 6.0 Ah (x2) | 34 mins | | |
| | | | |



STANDARD EQUIPMENT:

Storage Box | High Pressure Nozzle | Cycle Jet Nozzle | Connector Set

| DHW080PG2 | 6.0 Ah LXT Battery (x2) |
|-----------|-------------------------|
| DHW080ZK | Body Only |

LXT Battery Charger

| her | |
|---------|--|
| Trakita | |

BL LXT 36V



Connector Set



Joint

POWER WASHERS

GROUNDS MAINTENANCE

| 197870-7 Extension Assembly | | 197842-2 Trigger Gun Assembly | | |
|--|---|---|------------|--|
| 197881-2 Supply Connector Set | | 197837-5 10m 197840-6 15m Hoses | | |
| 197867-6 Anti Twist Joint Assembly | 0 | 197845-6 5m 197847-2 8m 197850-3 10m | \bigcirc | |
| 197822-8 Variable Nozzle | | 126766-5 10m High Pressure Hoses | | |
| 197876-5 1912Y5-9 1912Y6-7 Vario Nozzle | | 197864-2 Cyclone Guard Assembly | | |
| 197824-4 Cyclone Jet Nozzle | | | | |

240V | Mains Pressure Washer




| SPECIFICATIONS | HW1200 |
|------------------|----------|
| Voltage | 240V |
| Weight | 11.0 kg |
| Maximum Pressure | 120 bar |
| Maximum Flow | 420 L/hr |
| Hose Length | 10 m |
| Input Power | 1.0 kW |
| Regular Pressure | 100 bar |

STANDARD EQUIPMENT:

Trigger Gun | Vario-Power Spray Lance | Cyclone Jet Nozzle | Cleaner Pin Detergent Bottle | Coupling Sleeve | High Pressure Hose | Connector Water Hose Connector | Foam Nozzle

Body Only

| HW1200 |
|--------|
|--------|



ADJUSTABLE

Enables not only high pressure washing, but also low pressure mode for washing screen doors, air conditioners, and car bodies.



STANDARD EQUIPMENT:

SPECIFICATIONS

Maximum Pressure

Maximum Flow

Hose Length

Input Power Regular Pressure

HW1300

Voltage

Weight

LOW NOISE MODE

240V | Mains Pressure Washer

Thakita

HW1300

240V

12.7 kg

130 bar

450 L/hr 10 m

1.8 kW

Trigger Gun | Vario-Power Spray Lance | Cyclone Jet Nozzle | Cleaner Pin Detergent Bottle | Coupling Sleeve | High Pressure Hose | Connector Water Hose Connector | Foam Nozzle

Body Only

80 - 110 bar

About 10% less noise and 20% less water than high pressure mode



ACCESSORIES

| 123784-4 High Pressure Hose (10m) | 197824-4 Cyclone Jet Nozzle | | 197831-7 Rotating Brush | 8 | 197881-2 Supply Connector Set | |
|---|---------------------------------------|---|--------------------------------------|---------------------------|---|---|
| 197845-6 HP Extension Hose (5m) | 197886-2 Foam Nozzle Set | | 197828-6 Wash Brush Set | | 197867-6 Anti Twist Joint Assembly | 0 |
| 197847-2 HP Extension Hose (8m) | 197822-8 Variable Nozzle Set | | 197864-2 Cyclone Guard Set | | 197853-7 Accessory Joint Set | |
| 197850-3 HP Extension Hose (10m) | 197876-5 Spray Lance Set | / | 197842-2 Trigger Gun Set | | 191U86-2 Variospray Nozzle | |
| 197837-5 10m 197840-6 15m Pipe Cleaning Hose | 198909-9 Under Body Spray Lance | > | 197935-5 Connector Set | ● ■ □ → ★ | 191U88-8 Variospray Lance | |
| 197873-1 Self Suction Hose Set | 197870-7 Extension Assembly | | 197883-8 One Touch Joint Set | | 197879-9 Cleaner Pin | 0 |

POWER WASHERS

GROUNDS MAINTENANCE





MAKITAUK.COM

Accessories shown are not necessarily supplied as standard equipment. Prices and specification shown may change owing to our policy of constant improvement. Subject to availability. E&OE.

98N398 0924