

GARDEN CATALOGUE

makit

APRIL 2024

SYMBOL KEY / CONTENT

Garden Products	New Products				4
110V 110V	Cordless Garden Products	XGT	LXT	CXT	
	Chainsaws	A6	A16	-	
240V 240V	Earth Auger	A7	A22	-	
Electronic ignition	Split-Shaft	A9	A23	÷	
Variable speed trigger	Brush Cutters	A9	A18	÷	
	Linetrimmers	A10	A18	-	
Soft start	Blowers	A12	A24	-	
Electronic brake	Hedge Trimmers	A13	A26	A29	
	Pruning Saw	-	A29	A30	
Inertia brake	Pruning Shears	-	A30	A31	
Automatic chain brake	Sprayers	-	A31	A31	
Anti-Vibration system	Grass Shears	-	A34	A34	
	Wheelbarrow	-	A32	·	
Tool-less blade change	Lawn Mowers	A14	A35		
Decompressor	Petrol / Electric Garden Produ	cts			
4 stroke	Chainsaws				A42
a stroke stroke	Linetrimmers				A42
Double insulated	Hedge Trimmers				A43
	Lawn Mowers				A43
	Scarifiers				A45
	Shredder				A45



Every Makita Tool is thoroughly inspected and tested before leaving the factory and is guaranteed to be free of defects from workmanship and materials for the period of ONE YEAR from the date of original purchase. Should any trouble develop during this one year period, return the COMPLETE tool freight prepaid, to EITHER an Authorised Makita Service Agent or to Makita (UK) Ltd. If inspection shows the trouble is caused by defective workmanship or material, Makita will repair WITHOUT CHARGE. This guarantee does not apply where:

· Repairs have been made or attempted by others.

- Repairs are required because of normal wear and tear.
- · The tool has been abused, misused or improperly maintained.

· Alterations have been made to the tool.

This guarantee does not affect your statutory rights.



3

makitauk.com for the latest noise and vibration figures

Makita (UK) Ltd, Michigan Drive, Tongwell, Milton Keynes, Bucks, MK15 8JD Tel: 01908 211678

Makita Corporation is a member of The European Power Tool Association.

All machines in this catalogue conform to CE Marking Regulations. All weights quoted in this catalogue conform to EPTA procedure 01. All vibration figures conform to the relevant EN standard. VAT calculated at 20% subject to change. Accessories shown are not necessarily supplied as standard equipment. Prices and specification shown may change owing to our policy of constant improvement. Subject to availability. E&OE.





Through Makita's innovative engineering, the technology within the XGT system will create the equipment and tools of the future. Tools equivalent to petrol or mains power with zero emissions and no trailing cables, XGT is safer and better for the environment.

Digital communication between battery and charger, and battery and tool - reduces charge times and protects batteries and tools from damage prolonging their life.

Thakita.

m

120+ PRODUCTS

ONE SYSTEM







PURE COPPER WIRE Makita® XGT® Products feature purpose-built brushless motors with more copper windings for increased power output.

RARE EARTH MAGNETS Rare earth magnets of the highest quality are engineered within the brushless motors to maximise power and performance.



BUILT-IN MICROCHIPS Built-in microchips in both tool and battery allow for real-time digital communication, actively monitoring heat, overload, and over-discharge.

DIGITAL COMMUNICATION Digital communication between XGT® Tools and Batteries through enhanced digital communication technology optimise performance to deliver up to 2X longer sustained power during demanding applications.



IMPACT ABSORBENT STRUCTURE Durable outer casing and cell holder create space within the battery to absorb impact.

WATER & DUST RESISTANCE Water and dust-resistant triple layer structure and an enhanced terminal structure are engineered to protect against water and dust for any job site condition.



MULTI-LAYER SURFACE CONTACTS Multi-layer surface contacts within tool and battery are designed to take on high current demands.

RAPID OPTIMUM CHARGING SYSTEM XGT® Charger and Dual Cooling Fans digitally communicate before and during the charging process, evaluating battery condition to deliver a consistent fast charge. Charges LXT® batteries with adapter.



XGT is a system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.



DIGITAL COMMUNICATION Tool ◀► Battery ◀► Battery Charger



Thakita

4-LED FUEL GAUGE INDICATOR

OPTIMUM POWER SUPPLY

AND CHARGING SYSTEM

The XGT range of tools and batteries come

battery. A battery technology and motor that

with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk

with tool but also the tool to talk to the

work together for optimum performance.

Insulating Film

paper

Waterproof ring

WATERPFOOF TRIPLE-LAYER

Heavy duty

outer casing

and cell holde

Create a space

to absorb impact

SHOCK ABSORPTION

RAPID CHARGING SYSTEM

The charger will cool down the battery before charging if the battery temperature is high. Built-in fan circulates air through the battery before charging and during to cool the battery for a faster charge time.





Natural heat dissipation

The optimum charging system General charging method **OPTIMUM CHARGING** SYSTEM Auto maintenance system with two cooling fans to provide faster charging

Over Discharging Over Charging High Temperature

This communication technology allows the tool and battery to monitor conditions and exchange data in real time to protect against Overload, Over-Discharge and Overheating.



The Makita Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimise battery life by actively controlling current, voltage and temperature.



Anytime Charge No Memory Effect No Discharging Rec

Shock Absorbing Heavy Duty Pack





Multi-contact terminals reduce electrical resistance and increase connection stability withstanding against vibration, and ultimately ensures a stable current supply to the tool.

COMMUNICATION

XGT CORDLESS



40V Max XGT Brushless Top Handle Chainsaw	UC003G
Max Output 1,400 W Bar Length 250mm (UC002G) 300 mm (UC003G) TO BE USED BY TRAINE Chain Type 90PX Chain Pitch 3/8" Chain Gauge 0.043" Chain Speed 0 - 24.8 m/s Oil Tank Capacity 200 ml Net Weight 3.8 - 4.7 Kg	
Model Versions UC002GD202 2x 2.5Ah UC002GZ Body Only UC003GD202 2x 2.5Ah UC003GZ Body Only	
STANDARD EQUIPMENT: Fast charger, battery cartridges, guide bar, saw cha wrench, oil supply	sin,
40V Max XGT Brushless Telescopic Pole Saw	UA004G
Max output Power 1,500 W No Load chain speed 0-20 m/s Bar length 300 mm Chain type 91PX Chain Pitch 3/8"	
Chain Gauge 0.050" Oil tank capacity 160ml Net weight 7.8 - 9.1kg	
Oil tank capacity 160ml	OVERALL LENGTH (EXCL. CHAIN BAR) 2.6 - 3.8 METERS, TELESCOPIC RANGE 0 - 1.2 METERS
Oil tank capacity 160ml Net weight 7.8 - 9.1kg Imaktin Imaktin Imaktin	
Oil tank capacity 160ml Net weight 7.8 - 9.1kg Image: Construction Transition Model Versions UA004GD203 2x 2.5Ah	TELESCOPIC RANGE 0 - 1.2 METERS
Oil tank capacity 160ml Net weight 7.8 - 9.1kg Image: Comparison of the second seco	TELESCOPIC RANGE 0 - 1.2 METERS
Oil tank capacity 160ml Net weight 7.8 - 9.1kg Imakter Imakter Imaker Imakter <	telescopic range o - 1.2 meters
Oil tank capacity 160mi Net weight 7.8 - 9.1kg Imaktin 7.8 - 9.1kg Imaktin Imaktin Imak Imaktin	TELESCOPIC RANGE 0 - 1.2 METERS
Oil tank capacity 160mi Net weight 7.8 - 9.1kg Image: Construction of the second se	TELESCOPIC RANGE 0 - 1.2 METERS

UX01G

GET 80V MAX POWER FROM YOUR 40V MAX BATTERIES

Utilise your 40V Max batteries to get more power and run time from our 80V Max machines. The powerful 80V motor is powered by two 40V Max batteries in either 2.5Ah, 4.0Ah, 5.0Ah or 8.0Ah capacities.

XGT is a genuine solution for high demand industrial applications. A combination of innovative tool design and higher output batteries, providing a genuine solution for high demand industrial users as well.

The tough XGT construction design is supported by a charging system that charges batteries in as little as 28 minutes.





40V Max XGT Brushless Split-Shaft

 No Load Speed (Hi)
 0 - 9,700 rpm

 No Load Speed (Med)
 0 - 8,200 rpm

 No Load Speed (Lo)
 0 - 5,700 rpm

 Max Output
 1,000W

 Net Weight
 4.2 - 12.6kg

See page A23 for attachments





UX01GD202 2x 2.5Ah UX01GZ Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridges, shoulder strap, hex wrench, accessory bag.

40V Max x2 (80V Max) XGT Brushless Brush Cutter

 Max output
 2,000W

 Speed Settings
 3 speed + ADT mode

 No Load Speed (L/M/H)

 Spindle Size
 M10 x 1.25 L

 Cutting Diameter
 480mm

 Net Weight
 8.0 - 9.3kg



AFT

EXEN BL

UR012GT203 2x 5.0Ah UR012GZ04 Body Only

Model Versions

STANDARD EQUIPMENT: Nylon cutting head, hex wrench x2, box wrench, shoulder belt, accessory bag, fast charger, battery cartridges.

40V Max XGT Brushless Brush Cutter

1,500W	ANTI-RESTART FUNCTION
3,500 – 6,700rpm	
M10 x 1.25L	
450mm	
5.9 – 7.2Kg	
	3,500 - 6,700rpm M10 x 1.25L 450mm

Model Versions UR013GT206 2x 5.0Ah UR013GZ03 Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridges, Nylon cutting head, shoulder belt, box wrench, hex wrench






UR013G





XGT CORDLESS

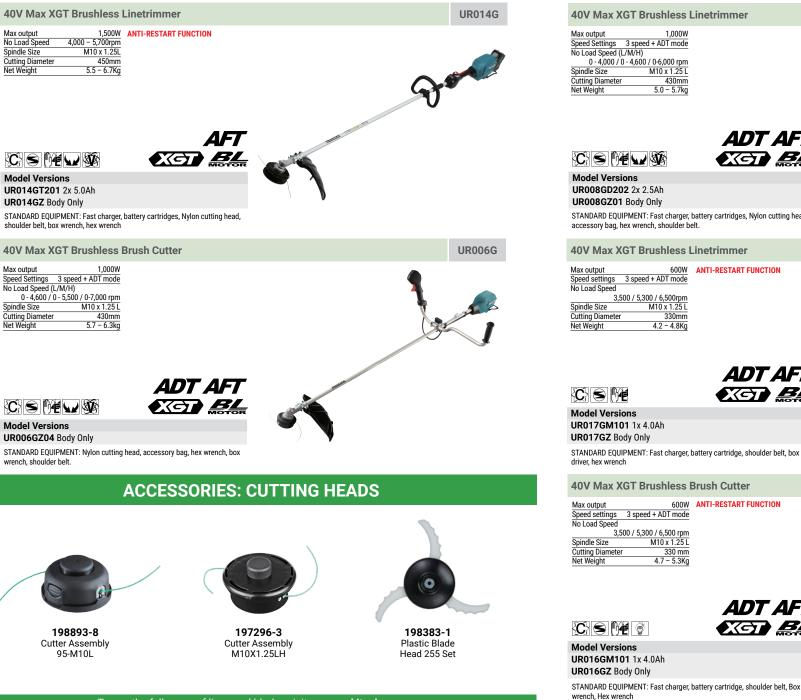




To see the full range of lines and blades visit www.makitauk.com

Body only machines and products do not come with batteries or chargers

XGT CORDLESS

UH004G

UH005G

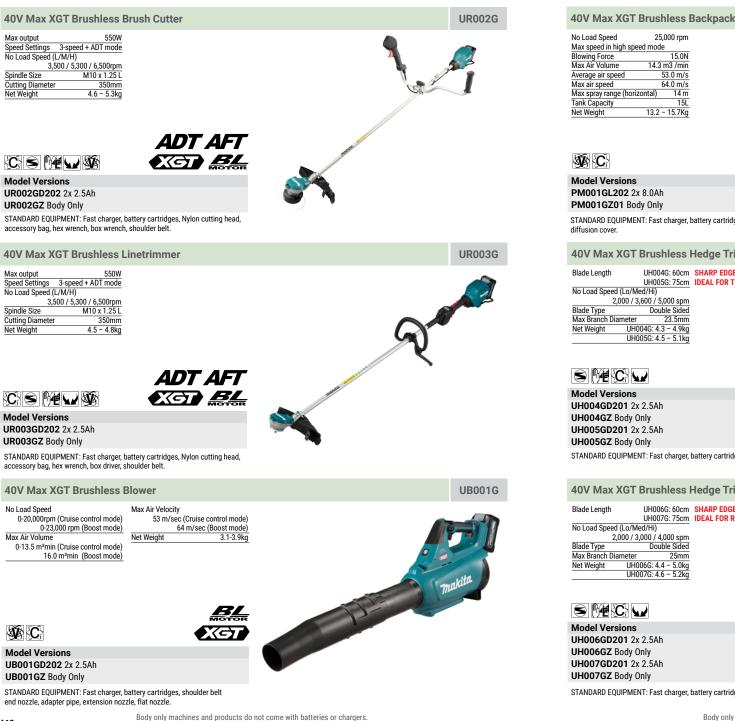

k Mist Blower		PM001G
	akita	
dges, Nozzle 0.5, wrench,		

40V Max XGT Brushless Hedge Trimmers

25,000 rpm

14.3 m3 /min

53.0 m/s

64.0 m/s

14 m


15L 13.2 - 15.7Kg

15.0N

Blade Length UH004G: 60cm SHARP EDGE CURVED BLADE: UH005G: 75cm IDEAL FOR TRIMMING No Load Speed (Lo/Med/Hi) 2,000 / 3,600 / 5,000 spm Blade Type Double Sided Max Branch Diameter 23.5mm Net Weight UH004G: 4.3 - 4.9kg UH005G: 4.5 - 5.1kg

Model Versions UH004GD201 2x 2.5Ah UH004GZ Body Only UH005GD201 2x 2.5Ah UH005GZ Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridges, blade cover.

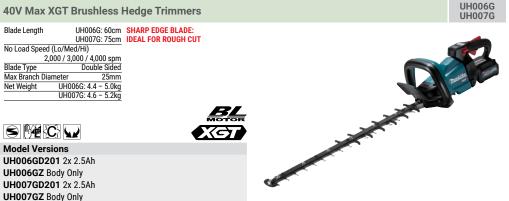

BL

XA

STANDARD EQUIPMENT: Fast charger, battery cartridges, blade cover.



XGT CORDLESS



STANDARD EQUIPMENT: Fast charger, battery cartridges, rod, mulching plug, discharge chute, wrench.

Max XGT Lawnmowe	r	LM003G
rtput (with an 8.0 Ah battery) d Speed 3,800 mm Adjustment 20 - 75 (8 stages) pacity 40L light 14.9 - 17.3kg	RECOMMENDED FOR LAWNS OF UP TO 780M ²	

RECOMMENDED FOR LAWNS

STANDARD EQUIPMENT: Fast charger, battery cartridge, mulching plug,

40V Max XGT Lawnmower

740W (with an 8.0 Ah battery) OF UP TO 830M² 3,800 rpm 430mm Height Adjustment 20 - 75 (8 stages) 50L 15.6 - 18.2kg

LM004GM103 1x 4.0Ah LM004GZ Body Only STANDARD EQUIPMENT: Fast charger, battery cartridge, mulching plug,

40V Max XGT Brushless Scarifier

1.700 W RECOMMENDED FOR LAWNS 3,200 rpm OF UP TO 510M² 380 mm +5 to -12 mm Handle Height Adjustment 2 stages 50L Collection container capacity 18.7 - 23.8kg



UV001GM201 2x 4.0Ah

STANDARD EQUIPMENT: Fast charger, battery cartridges, Thatching blade, box wrench.










BL

A15

80

LXT CORDLESS

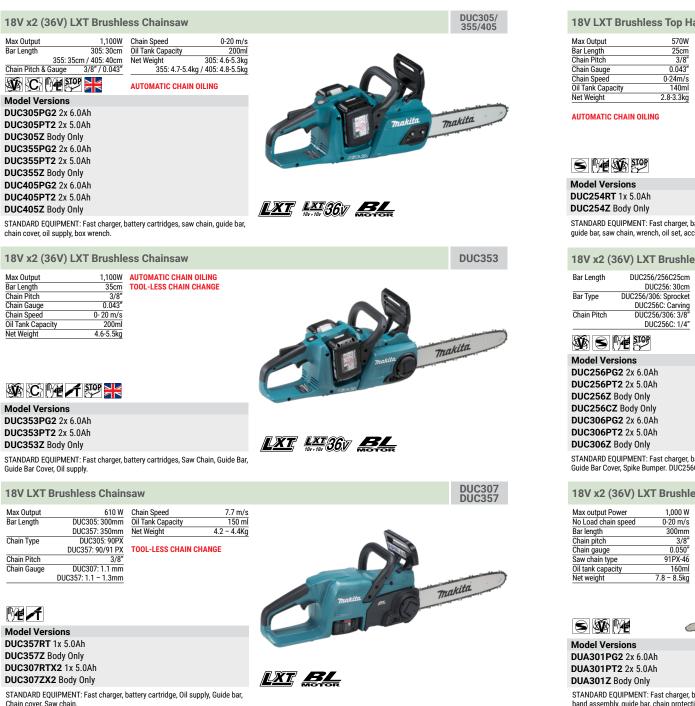

Body only machines and products do not come with batteries or chargers.

landle Chainsaw		DUC254
	Traktin CO Trick	utta
		USED BY TRAINED SURGEONS ONLY
battery cartridges, Chain cover, cessory bag.		
ess Top Handle Chainsaw		DUC256 DUC306
Chain Gauge DUC256/306: 0.043" DUC256C: 0.050" DUC256C: 0.050" Chain Speed 0 - 20 m/s Net Weight DUC256/306: 4.6-5.1kg DUC256CZ: 4.6-4.8kg DUC256CZ: 4.6-4.8kg	Turkitu 3	Thakita
		E USED BY TRAINED RBORISTS ONLY
battery cartridges, Saw Chain, Guide Bar, 6C: 25mm Carving bar and chain		
ess Telescopic Pole Saw		DUA301



1.000 W 0-20 m/s

300mm

0.050"

91PX-46

160ml

3/8"

STANDARD EQUIPMENT: Fast charger, battery cartridges, saw chain, wrench, hex wrench band assembly, guide bar, chain protection cover, round file, oil supply, lubricant.

makita

570W

25cm

3/8"

0.043

0-24m/s

2.8-3.3ka

140ml

OVERALL LENGTH (EXCLUDING CHAIN BAR) 2.6 - 3.8M METERS




LXT LXI36V BL AFT


LXT CORDLESS



Body only machines and products do not come with batteries or chargers.

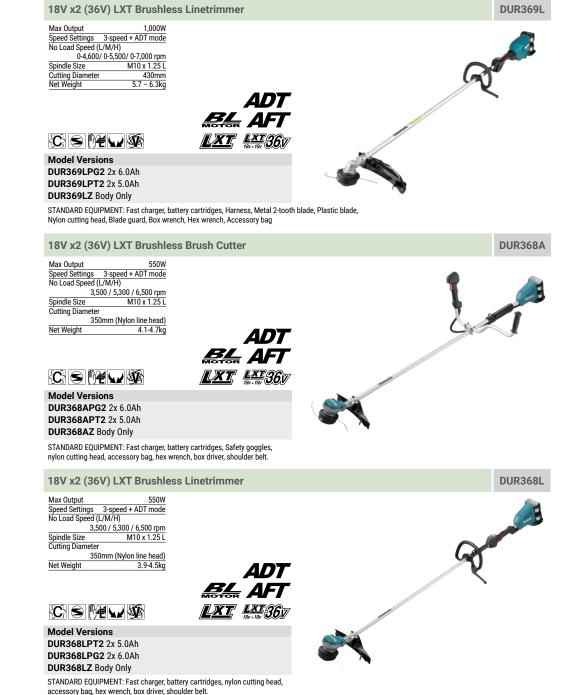

LXT CORDLESS

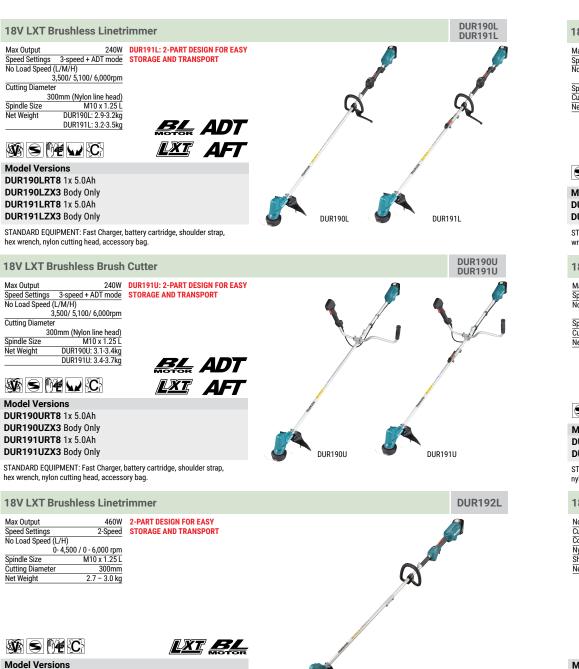

Model Versions DUR192LRT 1x 5.0Ah DUR192LZ Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridge, nylon cutting head, hex wrench, shoulder belt.

18V LXT Linetrimmer	DUR194
Max Output 230W Speed Settings 2-Speed No Load Speed (L/H) 0-4,500 / 0-6,000 rpm Spindle Size M10 x 1.25 L Cutting Diameter 280mm Net Weight 2.6 - 2.9 Kg	P.
STANDARD EQUIPMENT: Fast charger, Battery cartridge, Band Assembly, Hex wrench, Box driver, Trimmer head assembly	
18V LXT Brushless Linetrimmer	DUR189
Max Output 240W Speed Settings -Speed + ADT Mode No Load Speed (L/M/H)	Jon Ca
ADT ADT LXT Model Versions	


DUR189RT 1x 5.0Ah DUR189Z Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridges, Single harness, nylon cutting head, accessory bag, hex wrench.



DUR193RT 1x 5.0Ah DUR193Z Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridge, Nylon cutting head, Shoulder belt

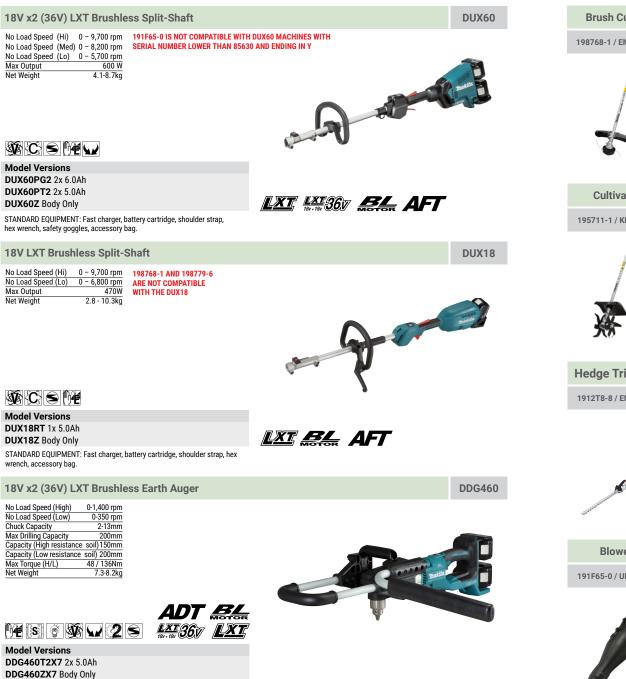

CORDLESS SPLIT-SHAFT ATTACHMENTS


Brush Cutter	Brush Cutter	Linetrimmer	Linetrimmer	Scissors
198768-1 / EM404MP	191N31-5 / EM408MP	198779-6 / EM406MP	191N49-6 / EM409MP	191M56-3 / EM407MP
-	-	St.		*
Cultivator	Edging Tool	Extension Pole	Pole Saw	Hedge Trimmer
195711-1 / KR400MP	196752-0 / EE400MP	191E24-8 / LE400MP	191T38-7 / EY403MP	196256-2 / EN401MP
X	20		-	100
Hedge Trimmer	Ground Trimmer	Ground Trimmer	Power Brush	Sweeper
1912T8-8 / EN402MP	1912T0-4 / EN422MP	1913C9-3 / EN424MP	199318-5 / BR400MP	199339-7 / SW400MP
		20		E
Blower	Blower	Blower	Water Pump	
191F65-0 / UB400MP	191P72-3 / UB401MP	1912R8-4 / UB402MP	DEAPF400MP / PF400MP	

Hex wrench, Adaptor x2.

STANDARD EQUIPMENT: Fast charger, battery cartridges, Chuck key,

LXT CORDLESS

UB001C

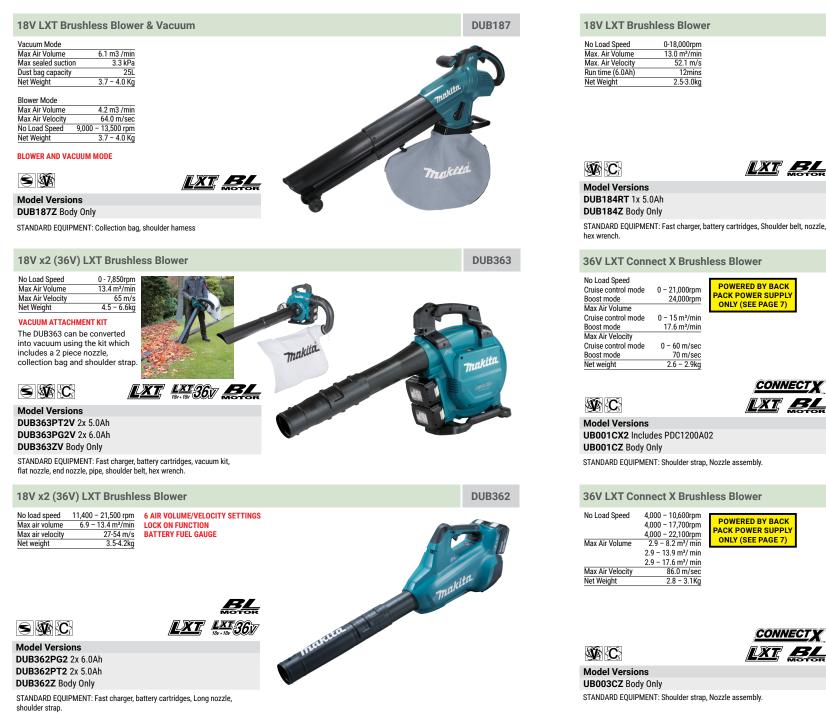



36V LXT Connect X Brushless Blower

Cruise control mode 0 - 21,000rpm 24,000rpm Cruise control mode 0 - 15 m³/min 17.6 m3/min 0 - 60 m/sec Cruise control mode

70 m/sec 2.6 - 2.9kg

POWERED BY BACK

PACK POWER SUPPLY

ONLY (SEE PAGE 7)

CONNECT X LXT BL

Model Versions UB001CX2 Includes PDC1200A02 UB001CZ Body Only


STANDARD EQUIPMENT: Shoulder strap, Nozzle assembly.



UB003CZ Body Only STANDARD EQUIPMENT: Shoulder strap, Nozzle assembly.


A26

LXT CORDLESS

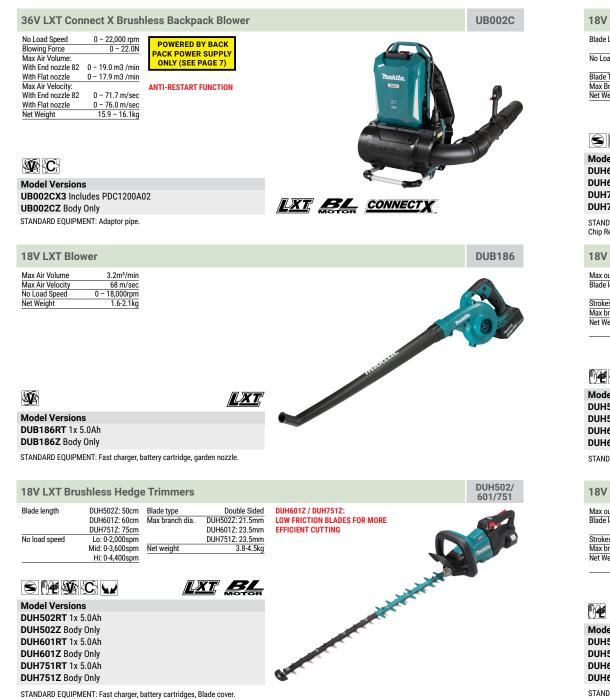


	hless Hedge Ti DUH604S: 60cm					DUH754S
Blade Length	DUH604S: 60Cm DUH754S: 75cm					
No Load Speed 2.000/ 3	3,600/ 4,400 spm					The second second
Blade Type	Single sided					Tanta
Max Branch Diameter	23.5mm				4	19 10 m
Net Weight	3.4 – 3.9kg					
					100	
					NK.	2
SME	$3 \mathbf{k}$	ĽXT	BL		N. C.	
Model Versions			Morek		and the second s	
DUH604SRT 1x 5	j.0Ah					
DUH604SZ Body				1.2		
DUH754SRT 1x 5	o.0Ah					
DUH754SZ Body	Only					
STANDARD EQUIPME	NT: Fast charger, batte	ry cartridges, Blade C	over,			
Chip Receiver		, .				
18V I XT Brus	hless Hedge Ti	rimmers				DUH506
						DUH606
Max output Blade length	DUH506: 500mm	FI-RESTART				
	DUH606: 600mm					
Strokes per minute Max branch diameter	4,000spm 20mm					
	1506: 2.5 – 2.9Kg					
	606: 2.7 – 3.0 Kg					
						Jan Barris
					1	E
		IXT	BL		and the second s	
			MOTOR		Ste	
Model Versions DUH506RT 1x 5.1	0.4.6			- Carton	E	
DUH506Z Body C				A		
DUH606RT 1x 5.				a start and a start a		
DUH606Z Body C						
		nu contriduc blodo co				
STANDARD EQUIPME	NT: Fast charger, batte	ry cartridge, blade co	ver.			
18V LXT Hedg	e Trimmers					DUH507 DUH607
Max output	250W					DOH007
	DUH507: 500mm					
	DUH607: 600mm					
Strokes per minute	2,700spm 15mm					
Strokes per minute Max branch diameter	2,700spm 15mm 1507: 2.7 – 3.0Kg					
Strokes per minute Max branch diameter Net Weight DUH	15mm					
Strokes per minute Max branch diameter Net Weight DUH	15mm 1507: 2.7 – 3.0Kg					
Strokes per minute Max branch diameter Net Weight DUH DUH	15mm 1507: 2.7 – 3.0Kg				J.	The second second
Strokes per minute Max branch diameter Net Weight DUH DUH	15mm 1507: 2.7 – 3.0Kg		<u>LXT</u> ,		and the second sec	The second second
Strokes per minute Max branch diameter Net Weight DUH DUH	15mm 1507: 2.7 – 3.0Kg		<u>LXT</u> ,		and the second second	17 m
Strokes per minute Max branch diameter Net Weight DUH DUH Model Versions	15mm 1507: 2.7 – 3.0Kg 607: 2.8 – 3.1 Kg		<u>LXT</u>		and the second second	and the second sec
Strokes per minute Max branch diameter Net Weight DUH DUH Model Versions DUH507RT 1x 5.	15mm 1507: 2.7 – 3.0Kg 607: 2.8 – 3.1 Kg 0Ah		<u>LXT</u>		and the second second	
Strokes per minute Max branch diameter Net Weight DUH DUH Model Versions	15mm 1507: 2.7 – 3.0Kg 607: 2.8 – 3.1 Kg 0Ah		<u>LXT</u>	- And and a	and a start of the	

LXT CORDLESS

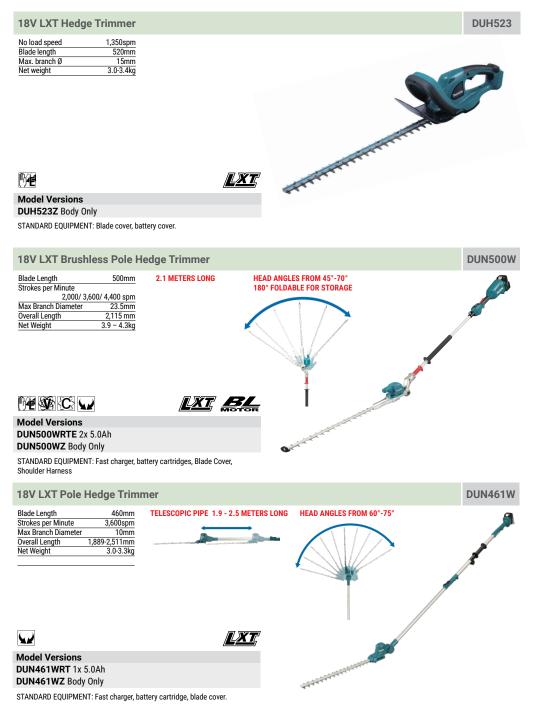

Body only machines and products do not come with batteries or chargers

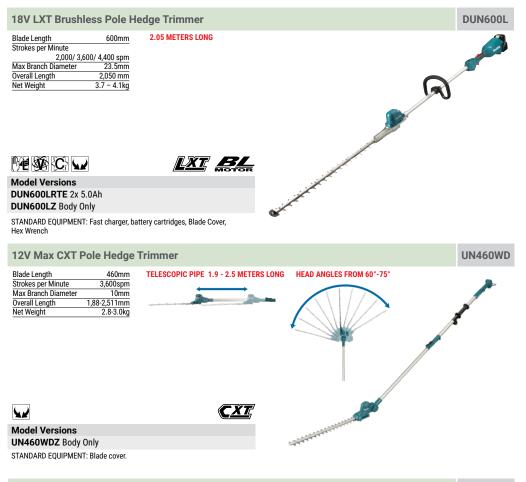

18V LXT Brushless Pruning Sa	aw	DUC150
Max output power 320W Chain speed 8.0 m/s Bar length 150 mm Chain pitch 0.325 " Chain Gauge 1.1 mm Saw chain type 80 TXL Chain number of links 32 Oil tank capacity 55 ML Net Weight 1.7 - 2.0kg	The second second second	and the second sec

Model Versions DUC150RT 1x 5.0Ah DUC150Z Body Only

STANDARD EQUIPMENT: Fast charger, battery cartridge, guide bar, guide bar case, file guide and file, oil set, saw chain.



LXT / CXT CORDLESS

12V Max CXT Brushless Pruning Saw

210W

8.0 m/s

100 mm

0.325 "

1.1 mm 80 TXL

55 ML 1.5 - 1.6 kg

26

LXT / CXT CORDLESS

DUP180

DUS158Z

IXT

US053D

0.5 MPa

15L

1.7 m

0.6 m

G 1/4


0.3 MPa

51

1.7 m

G ¼

21.2 Kg

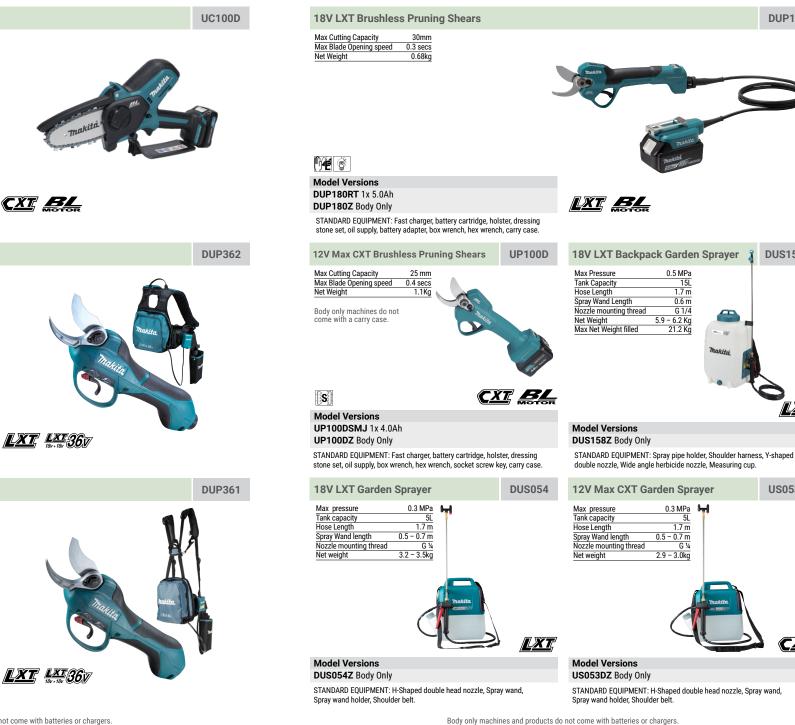

Max output power

Chain speed Bar length

Chain pitch

Oil tank capacity

Net Weight

TOOL-LESS CHAIN CHANGE



Model Versions UC100DWA 1x 2.0Ah UC100DZ Body Only

CXT BL

STANDARD EQUIPMENT: Standard charger, battery cartridge, guide bar, guide bar case, file guide and file, oil set, saw chain.

18V x2 (36V) LXT Pruning Shears

Max Cutting Capacity 33mm Max Blade Opening 54mm Cutting Torque 250Nm 3.3-3.9kg Net Weight

Model Versions DUP362Z Body Only

STANDARD EQUIPMENT: Oil supply, wrench set, diamond file, cord holder, holster, harness, arm band, tool bag, shear blade.

18V x2 (36V) LXT Pruning Shears	DUP36
Max Cutting I Max Blade O Cutting Torqu Net Weight	pening 54mm	Reference of the second s
Model Ver		
DUP361Z	N Body Only	

DUP361ZN Body Uniy

STANDARD EQUIPMENT: Oil supply, wrench set, diamond file, cord holder, holster, harness, arm band, tool bag, shear blade

ΧT

LXT CORDLESS

DCU180







Model Versions DCU602Z Body Only

STANDARD EQUIPMENT: Dump Bucket, clamp

18V x2 (36V) LXT Brushless	Wheelbarrow with Pipe	e Frame	DCU604
Max Loading Capacity 300kg on flat ground Max Climbing Angle 180kg on a 12° slope Forward Speed (3 speeds) 1.5 / 3.5 / 5.0 Km/h Reverse Speed 1.0 Km/h Net Weight 119 – 120kg			5
Model Versions	LXT LXI 36V		
DCU604Z Body Only			

12°
3.5km/h
1.5km/h
1.0km/h
32.5kg
44.5-44.8kg
39.3-39.6kg

18V LXT Brushless Wheelbarrow

Model Versions

DCU180PTX3 2x 5.0Ah + 199009-8 Pipe Frame DCU180PTX4 2x 5.0Ah + 199008-0 Bucket Frame DCU180PT2 2x 5.0Ah DCU180Z Body Only

STANDARD EQUIPMENT: Wrench x2, support legs, lock key, fast charger, battery cartridges.

DUC180	DUC180	DCU604/602/601	DCU604/602/601
Pipe Frame	Bucket	Pipe Frame	Flat Bucket
199009-8	199008-0	191B67-2	1911B3-6

LXT BL

Optional Accessories:

Pipe Frame

Bucket Frame



DCU604/602/601	DCU604/602/601
Dump Bucket	Dump Attachment
191B69-8	191B63-0



STANDARD EQUIPMENT: Clamp

LXT / CXT CORDLESS

LXT CORDLESS

RM350D



No Load speed of blade	2,300 rpm	MAX. WORK AREA 3,500m ²
No Load speed of wheels	41 rpm	
Max climbing angle	26 degrees	INTERGRATED BATTERY
Max mowing area	3,500 m2	18V 5.0AH LI-ION
Cutting width	240 mm	
Cutting height	20 - 60 mm	
Net Weight	13.7Kg	



V (C) () (É) (Ý

Model Versions RM350D 5.0Ah Intergrated Battery

STANDARD EQUIPMENT: Charging station, boundry wire, guide wire.



No Load Speed Max output Cutting Width Height Adjustment 11.6 - 12.5kg Net Weight

4.300 rpm RECOMMENDED FOR LAWNS 450 W OF UP TO 270m² 330mm 20 -75mm



DLM382

SME

Model Versions DLM330RT 1x 5.0Ah DLM330Z Body Only STANDARD EQUIPMENT: Fast Charger, battery cartridges, blade, wrench, mulching plug

LXT

18V x2 (36V) LXT Lawnmower

0 – 3,700rpm RECOMMENDED FOR LAWNS No Load Speed OF UP TO 560m² Blade Type Rotary type 2 tooth Cutting Width 380mm 20-75mm Height Adjustment Collection box 40 litres Net Weight 16.2-16.9kg



LXT LXT 36V


Model Versions DLM382PG2 2x 6.0Ah DLM382CT2 2x 5.0Ah DLM382Z Body Only

STANDARD EQUIPMENT: Fast Charger, battery cartridges, blade, socket wrench. DLM382CT2 with standard charger.



A34

LXT CORDLESS

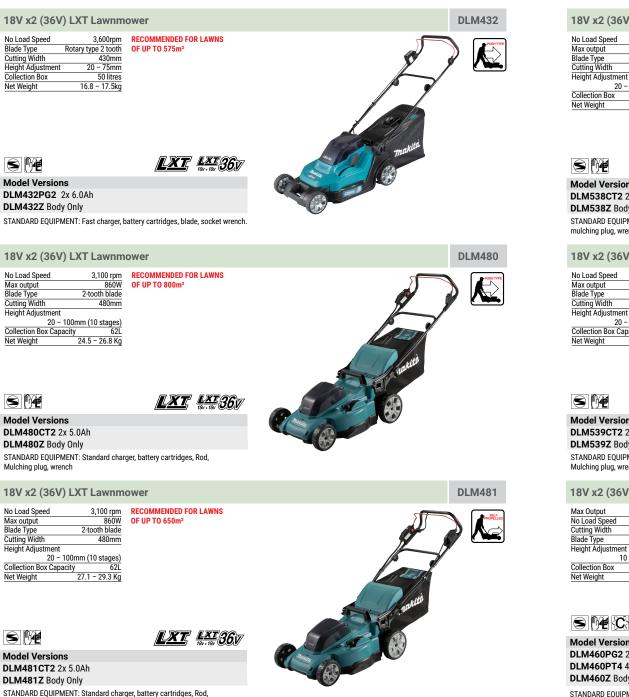

(36V) LXT Lawnm	ower	DLM538
3,000 rpm 860W 2-tooth blade th 534mm 20 - 100mm (10 stages) ox 70L 25.5 - 28.0kg	RECOMMENDED FOR LAWNS OF UP TO 800m ²	

SME

LXT LXI36V

RECOMMENDED FOR LAWNS

OF UP TO 700m²

Model Versions DLM538CT2 2x 5.0Ah

DLM538Z Body Only

STANDARD EQUIPMENT: Battery cartridges, Standard charger, blade, mulching plug, wrench, rod

860W

534mm

18V x2 (36V) LXT Lawnmower

No Load Speed 3.000 rpm Max output Blade Type 2-tooth blade Cutting Width Height Adjustment

20 - 100mm (10 stages) **Collection Box Capacity** 70 27.9 - 30.4 Kg Net Weight

SMÉ

LXT LXI36V

Model Versions DLM539CT2 2x 5.0Ah DLM539Z Body Only STANDARD EQUIPMENT: Standard charger, battery cartridges, Rod, Mulching plug, wrench

18V x2 (36V) LXT Brushless Lawnmower

Max Output 1.450W RECOMMENDED FOR LAWNS No Load Speed 2,500-3,300rpm OF UP TO 800m² Cutting Width 460mm Rotary type 2 tooth STEEL DECK Blade Type Height Adjustment 10 settings (20-75mm) 60 litres

Collection Box Net Weight 25.3-27.6kg

Model Versions DLM460PG2 2x 6.0Ah DLM460PT4 4 x 5.0Ah DLM460Z Body Only

STANDARD EQUIPMENT: Battery cartridges, fast charger, socket wrench.





Mulching plug, wrench

BL

LXT LXT 36V

LXT CORDLESS





Socket Wrench, Rod

4 X 18V BATTERIES: DLM462/530/532/533

4 Batteries for extended run time The DLM462, DLM530, DLM532, DLM533 have 2 battery banks. The mower will use 2 batteries at a time in series to power the 36V brushless motor. When one set of batteries run flat then simply turn



36V Brushless Motor

A38


64V MAX CORDLESS

LM004JM101



64V Max Brushless Lawn	mower	LM002JM101
No Load Speed: Standard Mode 2,800 rpm Soft No-Load Mode 2,300-2,800 rpm Max output 2,300W Cutting Width 534mm Height Adjustment 20 - 100mm (10 stages) Box Capacity 70L Net Weight 25.7 - 27.6kg	RECOMMENDED FOR LAWNS OF UP TO 1,600m ² This product is powered by the BL6440 64V 4.0Ah battery	Turkets
	SOFT BL	
Model Versions		
LM002JM101 1x 4.0Ah		
STANDARD EQUIPMENT: Fast Charger,	battery cartridge	

64V Max Brushless Lawnmower



2,300 rpm RECOMMENDED FOR LAWNS OF UP TO 3,800m² 534mm

31.5 - 34.6 Kg

This product is powered by the battery

ANTI-RESTART FUNCTION

BL6440 64V 4.0Ah

SOFT BL

Model Versions LM004JM101 1x 4.0Ah

STANDARD EQUIPMENT: Standard charger, battery cartridge, rod 6, mulching plug, discharge chute, wrench.

64V MAX BATTERY: LM002J & LM004J





Body only machines and products do not come with batteries or chargers.

CORDED ELECTRIC

CORDED ELECTRIC



UR3501/2

STANDARD EQUIPMENT: Nylon cutting head, harness, socket wrench.

STANDARD EQUIPMENT: Shoulder strap, spool assembly, safety glasses.

ectric He	dge Trin	nmer			UH5580/6580 /7580
ut wattage de length c. branch Ø weight	UH5580 670W 55cm 18mm 4.2kg	UH6580 670W 65cm 18mm 4.3kg	UH7580 670W 75cm 18mm 4.4kg		
J v [S] ()	é 🖸			Contract .	
del Versi	ons				
5580/2 6580/2					

STANDARD EQUIPMENT: Blade cover, cord hook for waist belt, 10m lead.

Electric Hedge Trimmer

UH4570	UH5570	UH6570
550W	550W	550W
45cm	55cm	65cm
18mm	18mm	18mm
3.6kg	3.7-3.8kg	3.8-3.9kg
	550W 45cm 18mm	550W 550W 45cm 55cm 18mm 18mm

UH4570/5570 /6570



Model Versions UH4570/2 UH5570/2 UH6570/2

STANDARD EQUIPMENT: Blade cover, cord hook for waist belt, 10m lead.

Electric Lawnmower

Input Wattage 1,600W No Load Speed 3,400rpm Cutting Width 41cm Cutting Heights 7 settings (20-75mm) Collection Box 50 litres 17.5-19.1kg Net Weight

RECOMMENDED FOR LAWNS OF UP TO 600Sm

STEEL DECK

240V Model Versions ELM4121X

STANDARD EQUIPMENT: Wrench, mulch plug.





CORDED ELECTRIC

CORDED ELECTRIC





Model Versions ELM4621X

STANDARD EQUIPMENT: Wrench, mulch plug.

Electric Lawnmower Input Wattage No Load Speed 1,200W 3,400rpm Cutting Width 33cm Cutting Heights (3-settings) 20 - 55mm Collection Box 30L Net Weight 10.2kg **RECOMMENDED FOR LAWNS** OF UP TO 400m² 240V Model Versions

ELM3320X

STANDARD EQUIPMENT: Wrench.

Electric Lawnmower				
Input Wattage	1,400W			
No Load Speed	3,400rpm			
Cutting Width	37cm			
Cutting Heights	(3-settings)			
20 – 55mm				
Collection Box	40L			
Net Weight	11.6kg			

RECOMMENDED FOR LAWNS OF UP TO 500m²



Model Versions ELM3720X

STANDARD EQUIPMENT: Wrench.





ELM3720X

Electric Scarifier

230-240v~50-60Hz

1300W

3500/min 32cm

-10~+10mm

5 settings

12.0kg

Rated voltage

No load speed

Working width

Working depth

Net weight

[] 240V

Height adjustment

COLLECTION BOX

Model Versions

Electric Scarifier

UV3200/2

Rated voltage

Rated power

No load speed

Working width

Working depth

Net weight

년 240V

Height adjustment

Model Versions

Electric Shredder

UV3600/2

Input wattage Max, branch Ø

Cutting speed

Net weight

Collection box capacity

Collection container capacity 30 litres

CAN BE USED WITH OR WITHOUT

STANDARD EQUIPMENT: 10m power lead.

Collection container capacity 40 litres

CAN BE USED WITH OR WITHOUT **COLLECTION BOX**

STANDARD EQUIPMENT: 10m power lead.

230-240v~50-60Hz

1800W

36cm

15.3kg

2,500W 45 mm

40 rpm

27.6kg

67 litres

3700/min

-10~+5mm

4 settings

Rated power

::: 240V Model Versions UD2500/2

STANDARD EQUIPMENT: 10m power lead.



UV3600





